


WOV-N-WIRE™ DEA CAGES

SPECIFICATIONS

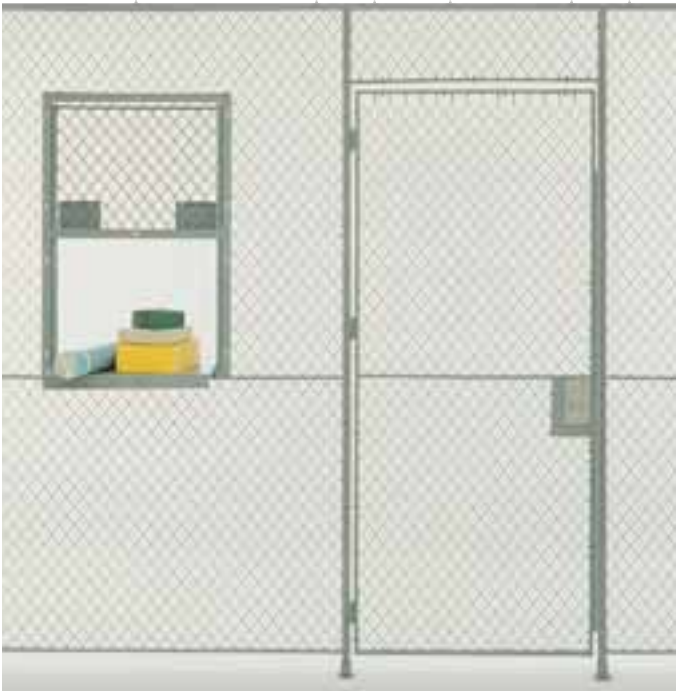

Our Woven Wire DEA Cages have become an industry favorite thanks to our ability to offer a durable, high quality system at a competitive price.

DEA Compliant Design All components meet or exceed DEA requirements when installed in accordance to Federal Code CFR 1301.72(b)(3)(ii). DEA requirements are unique to each installation, consult factory for specifics.

Panels 10 gauge steel wire woven into 1½" diamond mesh, securely clinched to framing.

Vertical Frames 1½" x 5⁄8" steel c-channels.

Horizontal Frames 1½" steel channel every 60".

Ceiling 10 gauge steel wire woven into 1½" diamond mesh, securely clinched to framing.

Center Reinforcing Bar Two steel channels 1" x 3⁄8" riveted through wire mesh at 3'6" from floor.

Corner Posts 1¼" x 1¼" steel angles, bolted to floor with pinned lag bolts.

Floor Sockets Cast aluminum.

Door Frame 1¼" x ½" steel channel.

Sliding Door 5'w x 7'h sliding door with built-in Keyed Different (KD) cylinder lock. Self-closing/locking.

Hardware Assembly and anchor hardware included.

Finish One shop coat grey gloss enamel.

Options Numerous range of lock and closure options. Powder coating finish.

Warranty 5-years.

Shipped knocked down.

**FOLDING
GUARD®**
CORPORATION
Providing Reliable Engineered Solutions

5858 West 73rd Street
Bedford Park, Illinois 60638
Toll-free: 1-800-622-2214
Fax: 708-325-0450
e-mail: sales@foldingguard.com
www.foldingguard.com