



Turn unused garage space into the ultimate in storage convenience.

CarLocker™ by Folding Guard Corporation is the affordable way to create new storage space. Now you don't have to give up valuable floor space or resort to an additional out-of-the-way room to have permanent easy-to-access storage for your property. Meets most local NFPA and BOCA codes.

Construction 8-gauge welded wire mesh with 1-1/2" x 1-1/2" grid pattern. Wire sides are framed by 1-1/2" x 1-1/2" x 1/4" carbon steel angles. Bottom panel is supported by "k" leg brackets which attach to wall.

Capacity 400 lbs. evenly distributed on bottom panel.

Doors Sliding and hinged style.

Mounting For new construction and retrofit installations, CarLocker™ can be mounted to either block or poured concrete walls or poured concrete ceilings. Consult installation submittal drawing for recommended dimensions and imbeds.

Finish Machine grey powder coating.

Options Solid sheet galvanized metal top cover, solid sheet galvanized metal bottom insert, and powder coated colors.

Accessories Variety of wire shelves, wire baskets and hanging hooks available.

Warranty 5-year limited warranty on parts and labor.

Wall Mount – Sliding Door

Part No.	W x D x H	Weight (lbs.)
WM833-S	8' x 3' x 3'	180
WM834-S	8' x 3' x 4'	185
WM843-S	8' x 4' x 3'	185
WM844-S	8' x 4' x 4'	190

Wall Mount – Hinged Door

Part No.	W x D x H	Weight (lbs.)
WM833-H	8' x 3' x 3'	180
WM834-H	8' x 3' x 4'	185
WM843-H	8' x 4' x 3'	185
WM844-H	8' x 4' x 4'	190

Ceiling Mount – Sliding Door

CM833-S	8' x 3' x 3'	175
CM834-S	8' x 3' x 4'	180
CM843-S	8' x 4' x 3'	180
CM844-S	8' x 4' x 4'	185

Ceiling Mount – Hinged Door

CM833-H	8' x 3' x 3'	175
CM834-H	8' x 3' x 4'	180
CM843-H	8' x 4' x 3'	180
CM844-H	8' x 4' x 4'	185

Concrete Imbed (Length)

Supplied with closure strip and end caps

IB-36	36"
IB-48	48"
IB-72	72"
IB-96	96"

Channel Stud Nut

HDSN-1/2 1/2" x 1-1/8"

Hex Nut

HDHN-1/2 1/2"

CUSTOM SIZES AVAILABLE

The concept and design of this product is protected by existing and pending patents.



CORPORATION
Providing Reliable Engineered Solutions


5858 West 73rd Street
Bedford Park, Illinois 60638
Toll-free: 1-800-622-2214
Fax: 708-325-0450
e-mail: sales@foldingguard.com
www.foldingguard.com

Options

Part No.	W x D
Wire Back – Flat	
WB-38	8' x 3'
WB-48	8' x 4'
Solid Metal Top	
SMT83	8' x 3'
SMT84	8' x 4'
Solid Metal Shelf Insert	
SMS83	8' x 3'
SMS84	8' x 4'

Accessories


Part No.	W x D x H
Baskets	
BL-24124	24" x 12" x 4"
B1266	12" x 12" x 6"
B12128	12" x 12" x 8"
Slant Shelves	
SS23152	23" x 15" x 2"
SS2466	23" x 6" x 6"
Hooks	
GH-16	Single 6" projection
GH-54	Five Hook 4" projection
GHPH-1.513	1-1/2" x 13" Chrome Pole Holder
DAGRD	Dual Arm Slant Holder

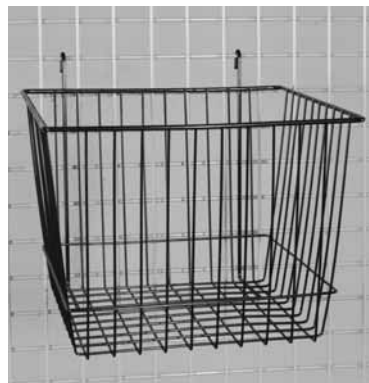

Basket B12128




Basket BL-24124

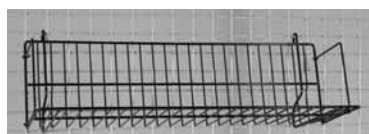

Slant shelf SS2466



Five hook GH-54

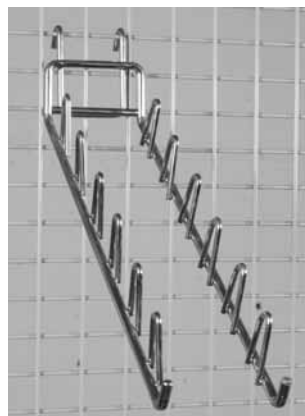

Dual arm slant holder DAGRD



Single hook GH-16

Architectural Specifications CarLocker™ Storage Lockers, Section 10512

PART 1 – GENERAL

1.1 Summary

A. Section includes: Wall mount over the car storage locker.

1.2 Submittals

- A. Product data: Submit manufacturer's technical data and installation instructions for materials required.
B. Shop Drawings: Submit shop drawings for fabrication and erection of tenant storage lockers. Include plans, elevations, and large scale detail showing anchorage and accessory items.

1.3 Quality Assurance

- A. Manufacturer: Provide storage lockers as complete units produced by a single manufacturer, including necessary mounting accessories, fittings, and fasteners.
B. Field measurements: Take field measurements prior to preparation of shop drawings and fabrication, where possible, to insure proper fitting of work.

PART 2 – PRODUCTS

2.1 Manufacturer

A. Products: Subject to compliance with requirements, provide the following tenant storage lockers:

1. "CarLocker™ Storage Lockers by Folding Guard Corporation, 5858 W. 73rd Street, Bedford Park, IL 60638.

2.2 Materials and Fabrication

A. General:

1. Storage lockers shall be welded wire with all welded components.
2. Backs shall be provided in all back-to-back installations, and all areas where a single row is set away from a wall.
3. See drawing for locations and configurations of lockers.

B. Components:

Size: _____" W x _____" H x _____" D

1. Panels: 8 gauge welded wire 1-1/2" x 1-1/2" grid pattern.
2. Doors: 8 gauge welded wire 1-1/2" x 1-1/2" grid pattern with two sliding doors with padlock hole.
3. Tops: 8 gauge welded wire 1-1/2" x 1-1/2" grid pattern. Or optional 22 gauge galvanized sheet metal.
4. Bottom: 8 gauge welded wire 1-1/2" x 1-1/2" grid pattern furnished with 12 gauge support channels. Or optional 22 gauge galvanized sheet metal insert.
5. Angle support: 1-1/2" x 1-1/2" x 12 gauge cold rolled carbon steel.
6. Vertical Angles: 1-1/2" x 1-1/2" x 12 gauge cold rolled carbon steel.
7. Door shall be sliding welded wire equipped with padlock hasp.

C. Finish:

1. Machine grey powder coating, except galvanized components.

D. Accessories:

1. Imbeds for new construction installation by Folding Guard Corporation. Baskets, hooks and shelf for use inside locker.

E. Fabrication:

1. All components shall be welded and pre-punched for installation.

F. Warranty:

1. The CarLocker™ Storage Locker shall carry a five-year (5) limited warranty.

PART 3 – EXECUTION

3.1 Installation

A. Erect CarLocker™ Storage Lockers plumb, rigid, properly aligned, and securely fastened to walls, complying with manufacturers recommendations.

3.2 Adjust and Clean

- A. Adjust moving components for smooth operation without binding.
B. Clean storage locker surfaces.
C. Protect storage locker units from damage, abuse, dust, dirt, stain, or paint. Do not permit lockers to be used during construction.
D. Touch up marred finishes, or replace units that cannot be restored to factory-finished appearance. Use only materials and procedures recommended or furnished by locker manufacturer.



CORPORATION

Providing Reliable Engineered Solutions

5858 West 73rd Street
Bedford Park, Illinois 60638
Toll-free: 1-800-622-2214
Fax: 708-325-0450
e-mail: sales@foldingguard.com
www.foldingguard.com